




AIR OPERATED DOUBLE DIAPHRAGM PUMPS

MDP SERIES

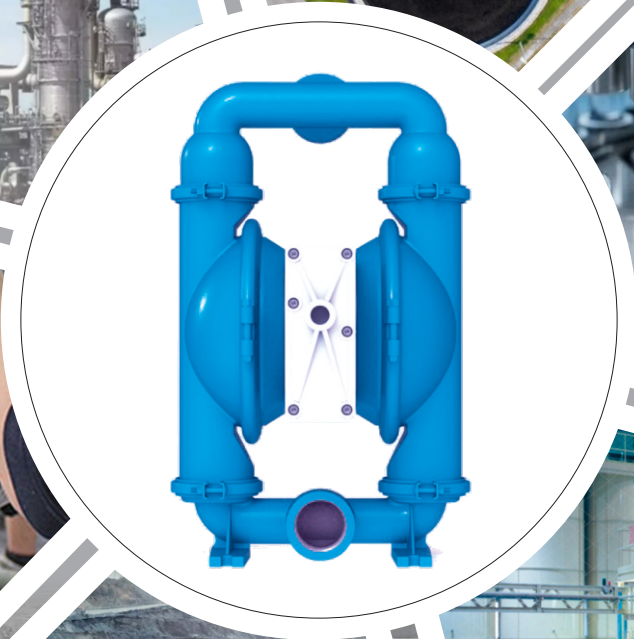

AIR OPERATED DOUBLE DIAPHRAGM PUMPS



MDP SERIES

THE PUMPS IN THIS SERIES ARE USED BY THE THE FOLLOWING INDUSTRIES:



AUTOMOTIVE



BEVERAGE



CERAMIC



CONSTRUCTION



SEWAGE



CHEMICAL



MINING



ELECTRONIC



PULP & PAPER



MUNICIPAL



REFINERIES



TEXTILE



UTILITY



PHARMACEUTICAL



FOOD




PAINT & COATINGS



MARINE



ENERGY

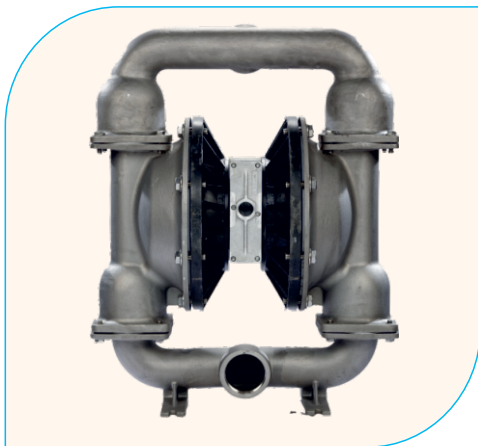

AVAILABLE IN
1/2", 1", 1.5", 2" & 3" SIZES

MDP FEATURES

- Maximum portability
- Safe for use in explosive environments
- Operates submerged or with flooded suction
- Self-Priming from a dry start up to 6 meters without foot valve.
- No Shaft seals or gland packing hence no leakage
- Variable flow
- Pressure up to 99 Psi
- Quick assembly & disassembly
- Low internal velocity reduces wear
- No sliding, rotating parts or closed fitting can handle wide range of fluids with high solid content.
- If pump stops or discharge is clogged no power consumed, no wear.
- By opening the discharge, flow starts automatically

MATERIALS OF CONSTRUCTION

- Standard Polypropylene, PVDF, Aluminum, Stainless Steel and Ductile Iron.
- Combination of Neoprene, Hytrel, Sentoprene, Teflon, Buna for different media.
- Combination also for NRV in Neoprene, Teflon & Stainless Steel.
- End connection for suction and discharge in BSP, Flange or NPT.
- Accessories such as hoses, air inlet connector, P U tubing, FRL Unit, Hose Clamps, Dampener, and Strainer are available.

Mody Pumps Inc.

2166 Zeus Court Bakersfield, CA 93308 , USA
For Sales Enquiry Contact : +1 (661) 392 - 7600
Email : insidesales@modypump.com